

AUX Input Adapter Installation & Start-Up Guide

1. Apply the parking brake and shift the car into drive (automatic cars) or neutral (manual cars).
2. Ensure the car is OFF and then disconnect the negative terminal on the car battery.
Remove the shift knob and the surrounding trim with the shift boot. Then disconnect the two connectors beneath the trim in order fully remove it.



3. Remove the 2 screws beneath the Faceplate/AC Climate Panel, and then pull the bottom of it toward you to release it, and then remove it after disconnecting the 4 connectors behind it.



4. Remove the 2 screws below the bezel/control panel buttons. Then gently wiggle & pull it toward you to remove that section.




5. Remove the 2 screws on the metal brackets below the display screen and then remove the screen assembly after disconnecting the 3 connectors behind it.



6. Remove the 2 screws on the bracket below the AV/Radio unit and then pull it forward some.
7. Disconnect all of the connectors going to it, including the ones going to the A/C amp (the upper white box that sits on top of the AV unit). Make a small identifying mark on the A/C amp connectors so to not confuse them with the other connectors for the radio. Once complete, pull out the AV Unit Assembly.



8. Now connect the adapter harness to the corresponding 12-pin factory connector and run the adapter's AUX Input cable to a location of your choice (ex. center console). Then connect the other side of the adapter harness to the AV Unit as shown.

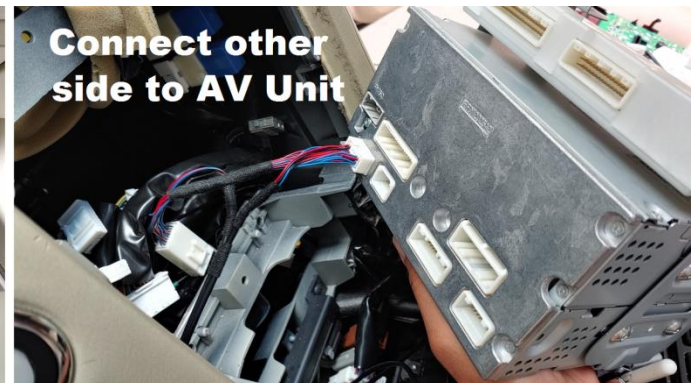

9. Reassembly is the reverse of steps 7-1.



10. Reconnect the negative battery terminal. Press the car's ignition button to the ON position.
11. Reset the car windows auto-up function (necessary when battery disconnected): Press and hold the window down button until the window is fully open. Release. Pull and hold the window up function for 6 seconds. Windows should now go up/down properly with the auto function. Repeat for all windows as necessary (can do two at once).
12. Once complete, connect your phone or other device to the AUX Input connection via a separately purchased 3.5mm cable.
13. Press the RADIO AM-FM Button and go to XM radio to use your new upgrade and away you go!

Enjoy Your New Setup!!